

ENTRY LEVEL tilt sensor with MEMS technology.

Space-saving solution, high performances, easy installation.

High IP protection level, resistance to shock and vibration, and high electromagnetic compatibility make this product suitable for many mobile hydraulics applications.

Developed to ensure a robust and high-performance solution for applications such as agricultural machines, construction machines, material handling equipments.

## TECHNICAL DATA

### Measurement range

$\pm 10^\circ \pm 15^\circ \pm 20^\circ \pm 30^\circ \pm 45^\circ \pm 60^\circ \pm 85^\circ$  (single axis Z for analogue output-dual axis XY)  
 $360^\circ (\pm 180^\circ)$  single axis Z only

### Supply voltage

+5Vdc (only for 0.5...4.5Vdc output); +10...+36Vdc (see output signal for right supply voltage)

### Output signal

0.5...4.5V RATIOMETRIC (supply +5Vdc); 0.5...4.5V; 0...10V; 4...20mA; CANopen

### Electrical connections

AMP Superseal 6P 282108-1; cable output - PUR sheath conductors 22 AWG  $\varnothing 4.4$  (single) -  $\varnothing 5.5$  (redundant); cable output + M12 5 pin male overprinted connector

### Resolution

$0.05^\circ (\pm 10^\circ \text{ to } \pm 20^\circ)$ ;  $0.05^\circ (\pm 30^\circ)$ ;  $0.1^\circ (\pm 45^\circ)$ ;  $0.1^\circ (\pm 60^\circ)$ ;  $0.1^\circ (\pm 85^\circ)$ ;  $0.1^\circ (\pm 180^\circ)$  analog output;  $0.05^\circ$  CANopen output

### Linearity

$< \pm 0.5\%$  FS ( $\pm 10^\circ$  to  $\pm 60^\circ$ ;  $\pm 180^\circ$ );  $< \pm 0.5\%$  FS ( $\pm 85^\circ$ )

### Working and coefficient temperature

$-40^\circ\text{C} \dots +85^\circ\text{C}$  thermal drift  $< 0.01^\circ\text{C}$  in the range ( $T = -10^\circ\text{C} \dots +60^\circ\text{C}$ )

### Vibrations

20g tra 10 Hz ... 2000 Hz IEC 60068-2-6

### Shock

Impulsive on 3 axes; 50g 11 ms IEC 60068-2-27

### Electromagnetic compatibility

2014/30/EU Electromagnetic Compatibility (EMC)


### IP protection level

IP67 - IPX9K with female mating connector mounted AMP282090-1 (GIB-A version); IP68 (GIB-F cable-PUR sheath version); IP67 (GIB-F cable+M12 connector version)

### Housing material

PBT

## MECHANICAL DIMENSIONS

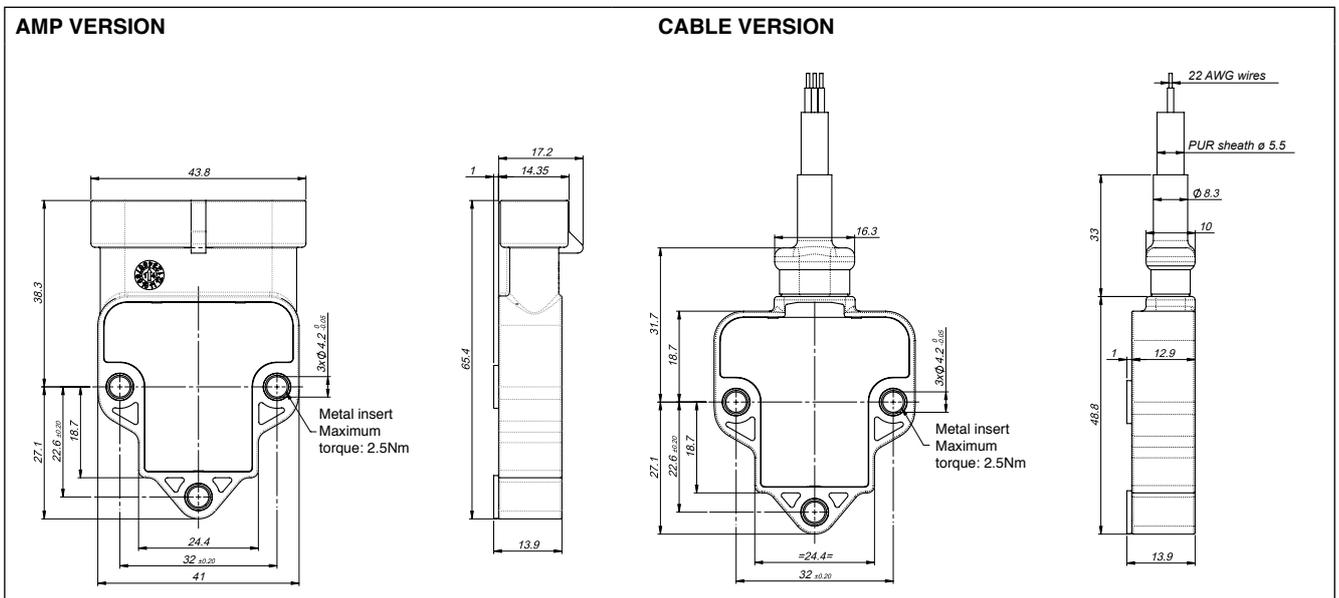

江门市利德电子有限公司

广东省江门市五邑碧桂园翠山聆水二街68号 邮编: (zip)529000


电话: + 86 750 3289680 3289698 传真: + 86 750 3289699

http://www.leadersensors.com E-mail: leader@leadersensors.com

# ELECTRICAL CONNECTIONS

## AMP VERSION

AMP Superseal  
6 pole 282108-1 connector  
Mated with connector  
AMP 282090-1

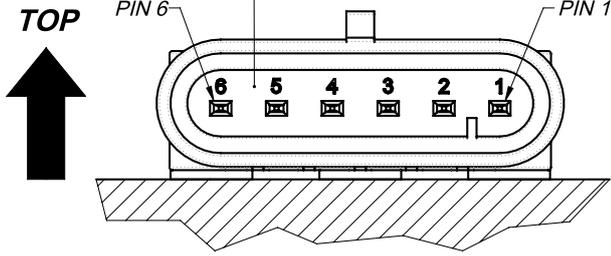


### CONNECTIONS

1. GROUND
2. + SUPPLY
3. OUTPUT X (dual axis)/  
Z (single axis)
4. OUTPUT Y (dual axis)/  
n.c. (single axis)
5. n.c.
6. n.c.


### CAN CONNECTIONS

1. GROUND
2. + SUPPLY
3. n.c.
4. n.c.
5. CAN L
6. CAN H

### SINGLE AXIS




### DUAL AXIS

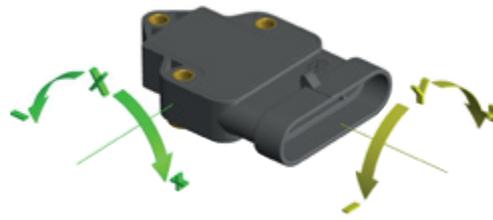

## CABLE VERSION

cable output PUR sheath  
22 AWG connector

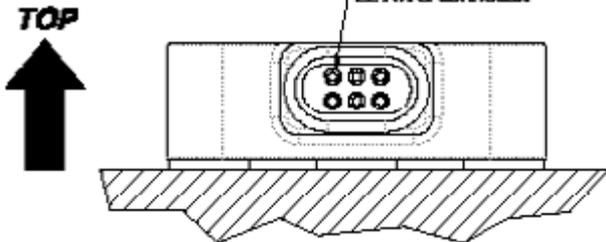


### CONNECTIONS

1. BLACK GROUND
2. RED + SUPPLY
3. YELLOW OUTPUT X (dual axis)/  
Z (single axis)
4. GREEN OUTPUT Y (dual axis)/  
n.c. (single axis)
5. BLUE n.c.
6. WHITE n.c.


### CAN CONNECTIONS

1. BLACK GROUND
2. RED + SUPPLY
3. YELLOW n.c.
4. GREEN n.c.
5. BLUE CAN L
6. WHITE CAN H

### SINGLE AXIS

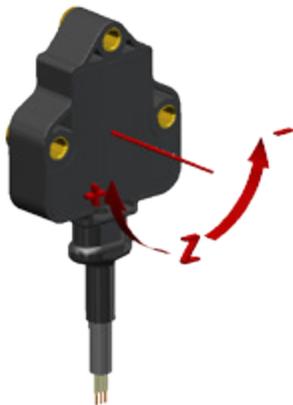


### DUAL AXIS

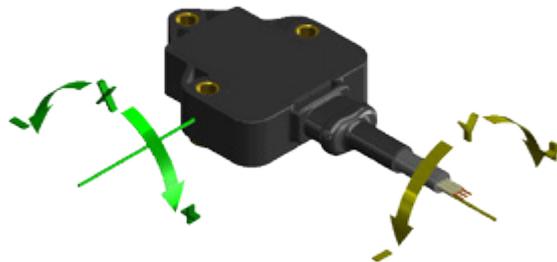


ITEMS MARKED "n.c." SHOULD NOT BE CONNECTED

# CABLE+M12 VERSION



PIN connections cable+M12	
PIN 1	RED
PIN 2	GREEN
PIN 3	BLACK
PIN 4	YELLOW
PIN 5	WHITE

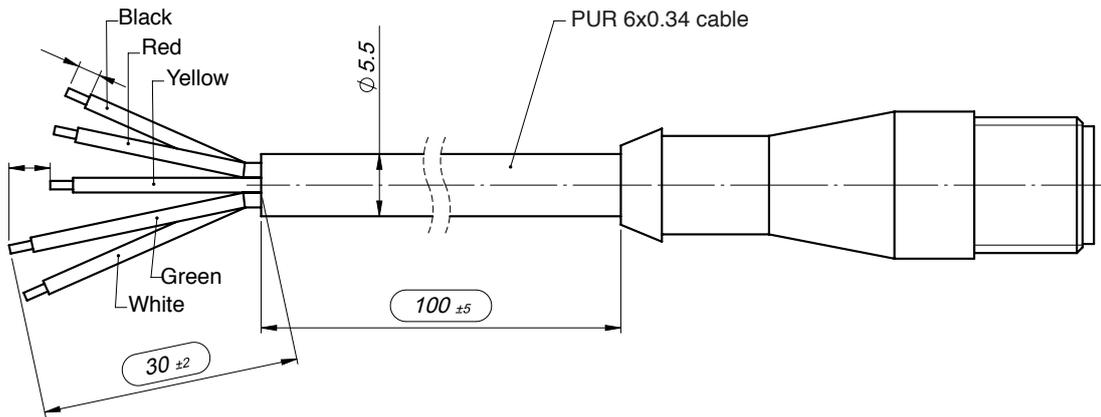


## FULL REDUNDANT VERSION

Gefran GIB tilt sensor is designed to be double mounted with specific spacers (BUS027) in order to have a full redundant space-saving version.



Please pay attention how to install the two GIB sensors: please position them both always face up or both face down.

### Example of AMP FULL REDUNDANT VERSION

#### SINGLE AXIS



#### DUAL AXIS

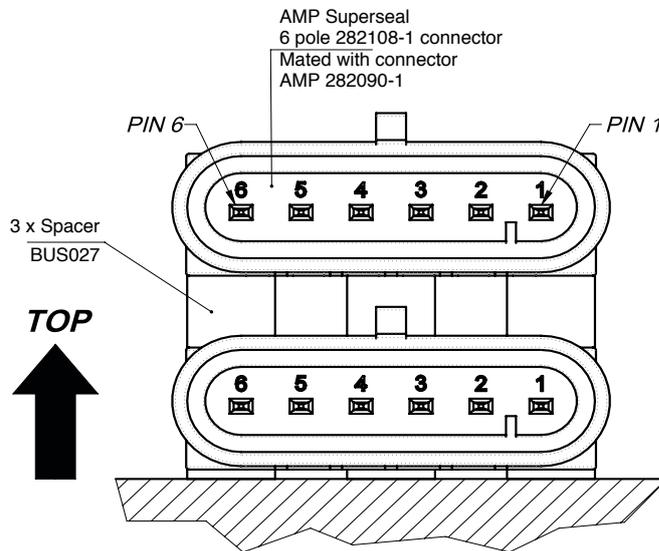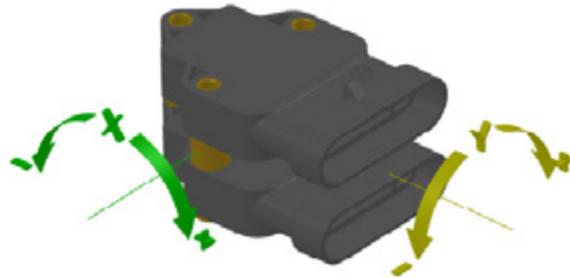

#### CONNECTIONS


1. GROUND
2. + SUPPLY
3. OUTPUT X
4. OUTPUT Y
5. n.c.
6. n.c.

#### CAN CONNECTIONS

1. GROUND
2. + SUPPLY
3. n.c.
4. n.c.
5. CAN L
6. CAN H

ITEMS MARKED "n.c." SHOULD NOT BE CONNECTED

#### MECHANICAL DIMENSIONS

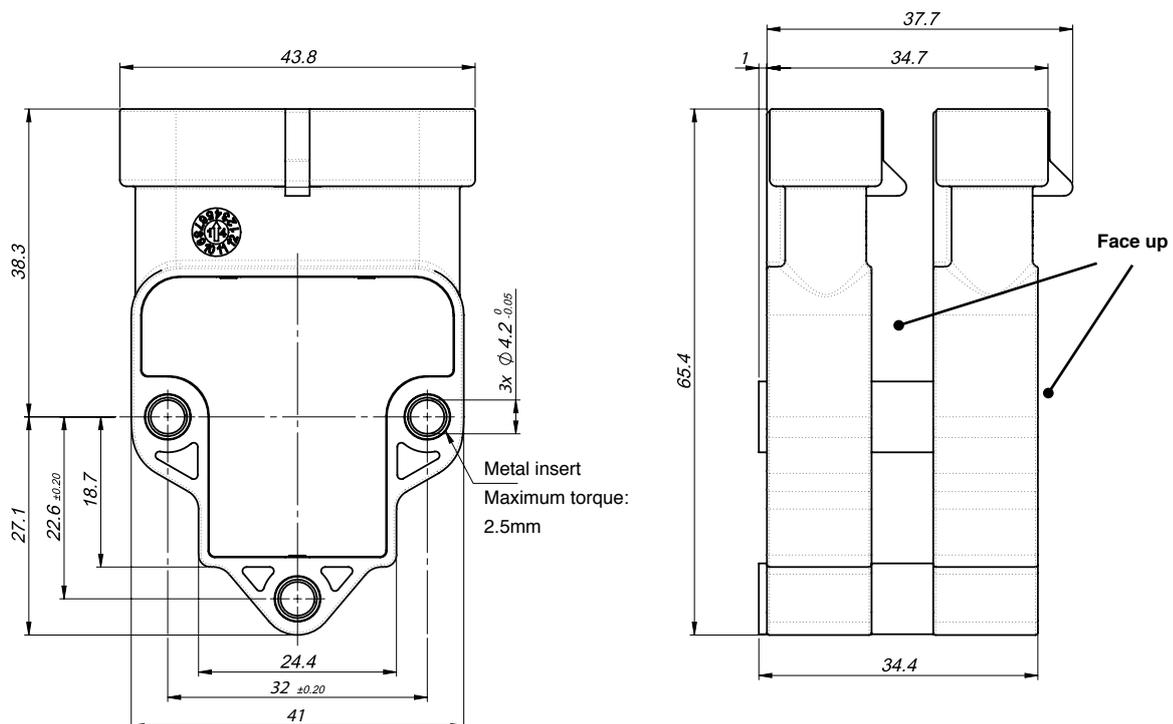

## AUTOZERO FUNCTION (additional function)

available for analog versions in GIB-XY configuration (dual axis)



To activate the **Autozero function** make sure that:

- sensor is powered
- fixing surface is free of dust or grease
- sensor is fixed on the horizontal plane with suitable screws



### ATTENTION!

The Autozero function can be defined **within a maximum range of +/- 4.5°** from the original zero position (factory set).

Hold the **magnetic pen** ① (accessory to order-PKIT312) to the **ZERO POINT**  indicated on the product label ②.

Hold the position for **at least 3-5 seconds** so that the operation is successful.

①





②





# FUNCTIONS: SENSOR OUTPUT GRAPH



DUAL AXIS TILT SENSOR (XY) - X AXIS

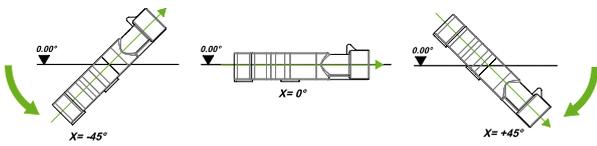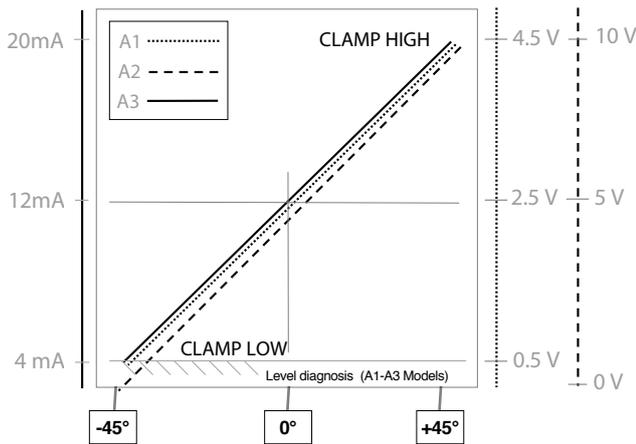

DUAL AXIS TILT SENSOR (XY) - Y AXIS

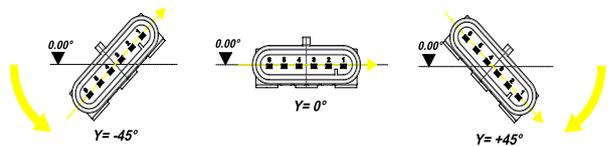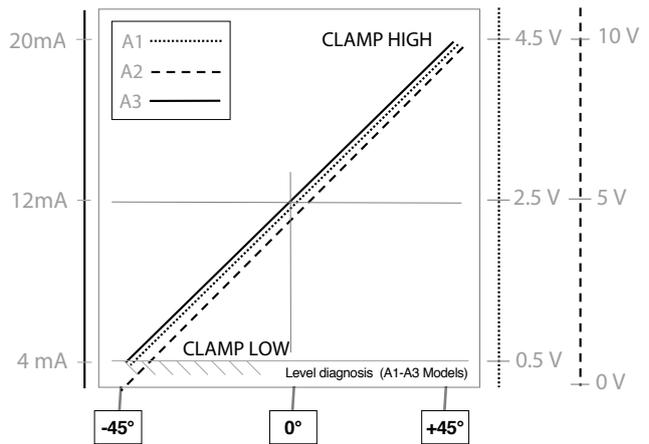

SINGLE AXIS TILT SENSOR ( $\pm 180^\circ$ ) - Z AXIS

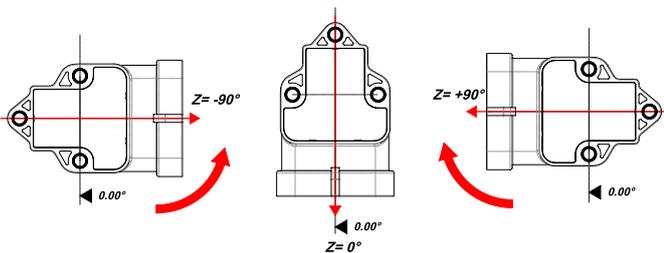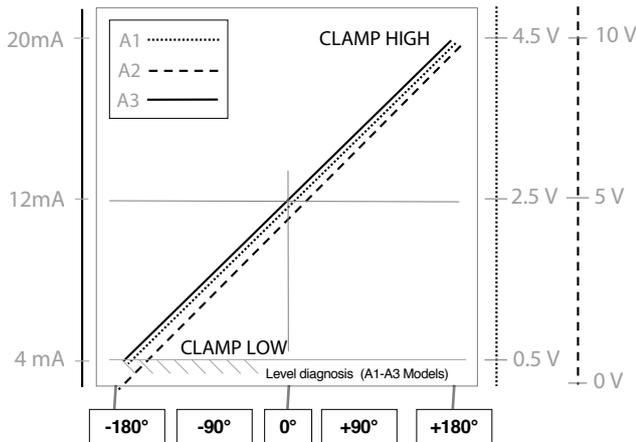

## LOAD CONDITIONS

+0.5Vdc...+4.5 Vdc output with power +10...36Vdc and +0..10Vdc output with power +11..36Vdc: it is recommended a load resistance > 100 K $\Omega$

+0.5Vdc...+4.5 Vdc output with power +5 Vdc: it is recommended a load resistance > 10 K $\Omega$

+4...20 mA output with power < 15Vdc up to 10Vdc: the maximum load resistance is admissible 200 $\Omega$

+4...20 mA output with power > 15Vdc up to 36Vdc: the maximum load resistance is admissible 500 $\Omega$

# ORDERING CODE

## GIB - SINGLE/DUAL AXIS ENTRY LEVEL TILT SENSOR (XY/360°)

ELECTRICAL CONNECTIONS	
AMP Superseal 6P connector output	<b>A</b>
Cable output (specify cable length)	<b>F</b>

AXIS TYPE	
Dual axis (XY axis)	<b>O</b>
Single axis (Z axis)	<b>V</b>

MEASURING RANGE	
measuring range (indicate) ±10° ±15° ±20° ±30° ±45° ±60° ±85° (single axis Z for analogue output-dual axis XY); 360° (±180°) for single Z axis only	<b>XXX</b>

MEASURING RANGE (NOT available)	
(redundant option NOT available)	<b>000</b>

SUPPLY VOLTAGE	
+5Vdc (only for A1 output)	<b>L</b>
+10...+36Vdc (see output signal for right supply voltage)	<b>H</b>

OUTPUT TYPE	
+0.5...+4.5Vdc output (available with supply L = ratiometric output and with supply H = 0.5...4.5V output)	<b>A1</b>
0...+10Vdc output (powered at +11...+36Vdc)	<b>A2</b>
4...20mA output (powered at +10...+36Vdc)	<b>A3</b>
CANopen output (powered at +10...+36Vdc)	<b>C1</b>

CABLE	
Cable without connector (always "0" in case of GIB-A version)	<b>0</b>
Cable (100mm) + M12 5 pin male overprinted connector	<b>1</b>

CERTIFICATE	
<b>0</b>	No certificate attached
<b>L</b>	Linearity curve to be attached

ACCESSORIES	
<b>X</b>	No accessories
<b>Y</b>	Magnetic pen <b>(PKIT312)</b>
<b>A</b>	3x spacers for redundant version <b>(BUS027)</b>

CABLE LENGTH	
<b>01</b>	cable 100 mm
<b>02</b>	cable 200 mm
<b>05</b>	cable 500 mm
<b>10</b>	cable 1 m
<b>20</b>	cable 2 m
<b>---</b>	other lengths on request

### EXAMPLE OF DESCRIPTION: GIBFV360000HA30 000X01

